
Masonry saw CSE350D

Cutting depth up to 125 mm



The CSE350D is a professional dry masonry saw that is particularly suitable for chop cuts thanks to the variable cutting depth. One of the highlights of this saw is its innovative dust extraction system, that collects dust directly by the saw blade and thus ensures clean working environment. Numerous settings and application options ensure maximum flexibility. Compact design, lightweight construction and an optional foldable table make it easy to transport and position on a job site. The fine-tuning between machine and diamond tool as an integrated system guarantees optimal cutting performance.

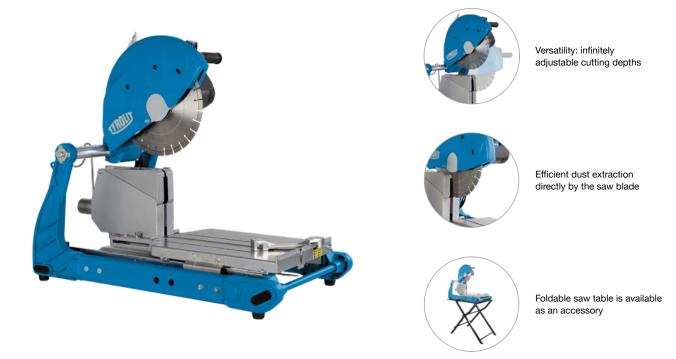

System & Accessories

Technical data

System & Accessories

Foldable saw table Water hose kit

| Tile saw CSE350D | | Accessor |
|--------------------------------------|----------------------|----------|
| Type no. | 11002435 | 11002433 |
| | | 11002434 |
| Saw blade | | |
| Max. cutting depth | 125 mm | |
| Max. saw blade Ø | 350 mm | |
| Cutting length | 400 mm | |
| Saw blade speed | 3600 rpm | |
| Saw blade holder Ø | 25.4 mm | |
| Drive | | |
| Drive / motor | Electric | |
| Motor power | 2.2 kW | |
| Voltage / frequency | 230 V / 50 Hz | |
| Motor cooling | Air | |
| Saw blade drive | Direct | |
| Application | Dry / wet (optional) | |
| Design | | |
| Cap cutting function | • | |
| Infinitely adjustable cutting depths | • | |
| Angle cutting function (angle stop) | • | |
| Built-in dust extraction | • | |
| Vacuum cleaner connection | • | |
| Dimensions & Weight | | |
| | 865 mm | |

Dimensions & Weight Length 865 mm Width 510 mm Height 510 mm Weight 40 kg

